

# AMERICAN RANGE®

A  Company

Project \_\_\_\_\_

Item # \_\_\_\_\_

Quantity \_\_\_\_\_

## 72" RESTAURANT RANGES

GAS TYPE:  NATURAL  LP



- |                                    |                                     |                                    |
|------------------------------------|-------------------------------------|------------------------------------|
| <input type="checkbox"/> AR-12     | <input type="checkbox"/> AR-12G-10B | <input type="checkbox"/> AR-24G-8B |
| <input type="checkbox"/> AR-36G-6B | <input type="checkbox"/> AR-48G-4B  | <input type="checkbox"/> AR-60G-2B |
| <input type="checkbox"/> AR-72G    |                                     |                                    |

### STANDARD FEATURES

- Commercial gas range 72" wide and 32 1/2" depth.
- Cooking height 36".
- Stainless steel sides, front and 6" deep front landing ledge.
- Adjustable steel legs (casters optional).
- Choose: 6" high stainless-steel stub back, high riser or high riser with shelf at no charge.
- Two year limited warranty, parts and labor.
- Base options: Standard, convection, innovection or storage base.

### OPEN BURNERS

- 12" x 12" cast-iron top grates.
- 32,000 BTU/hr lift-off open burners.
- Removable full width drip pan under burner.

### STANDARD OVEN (Two Standard 26 1/2" Ovens)

- Steel oven burner rated at 35,000 BTU/hr.
- Oven dimensions: 26 1/2"W x 22 1/2"D x 13 1/2"H.
- Thermostat ranging from 250°F to 500°F (121°C to 260°C).
- Oven Door: Spring assisted, counterweight door.
- Two chrome plated oven racks (additional racks optional).
- Two fixed rack positions.
- Porcelain enamel oven interior for easy cleaning.
- 100% safety gas shut off.

### CONVECTION OVEN (In place of standard oven)

- Steel oven burner rated at 30,000 BTU/hr.
- Convection oven fan improves heat transfer for a faster cook time.
- Thermostat ranging from 250°F to 500°F (121°C to 260°C).
- Two chrome plated oven racks (additional racks optional).
- Chrome rack guides with five tray positions.

### INNOVECTION® OVEN (In place of standard oven)

- Steel oven burner rated at 30,000 BTU/hr.
- Thermostat ranging from 250°F to 500°F (121°C to 260°C).
- Two chrome plated oven racks (additional racks optional).
- Two fixed rack positions.
- The low speed blower motor circulates heat to provide a uniform heating pattern.
- Great for baked goods.

### GRIDDLES

- 1" thick steel griddle plate.
- 3" wide grease collector.
- One burner every 12", rated at 20,000 BTU/hr.
- Stainless steel pilot for each burner for automatic ignition.
- Manual control valve for each burner. (Thermostatic control optional).

### AVAILABLE OPTIONS

- Swivel Casters (set of four – two with front brakes).
- Storage Cabinet Base. (In place of standard oven).
- Thermostatic Control Griddle.



### Model AR-36G-6B-NN

Shown with optional casters.

### DESCRIPTION

**American Range, restaurant range size 72" x 32-1/2" x 56"**  
Stainless steel front, sides, backriser, shelf and 6" adjustable legs. Removable full width drip pan. Choose 32,000 BTU/hr. open burners with no-clog lift-off burner heads or 20,000 BTU/12" section griddle or a combo burner griddle. Heavy-duty cast iron grates, 12" x 12". Burner knobs are cool to the touch, high temperature material. Two ovens: 35,000 BTU/hr. standard oven, 30,000 BTU/hr. for convection or innovection with porcelain interior and inside door panel, oven interior measures 26-1/2"W x 22-1/2"D x 13-1/2"H. Oven thermostat adjusts from 250°F to 500°F. All ovens supplied with two racks. Oven door with a spring assisted, counterweight mechanism requiring no adjustment. Rear gas connection and pressure regulator.



DESIGNED & BUILT IN USA  
PROFESSIONAL COOKING EQUIPMENT

# AMERICAN RANGE®

A  Company


13592 Desmond St Pacoima CA 91331

T. 818.897.0808 F. 818.897.1670

Toll Free: 888.753.9898

www.AmericanRange.com

# 72" RESTAURANT RANGES with two 26 1/2" ovens

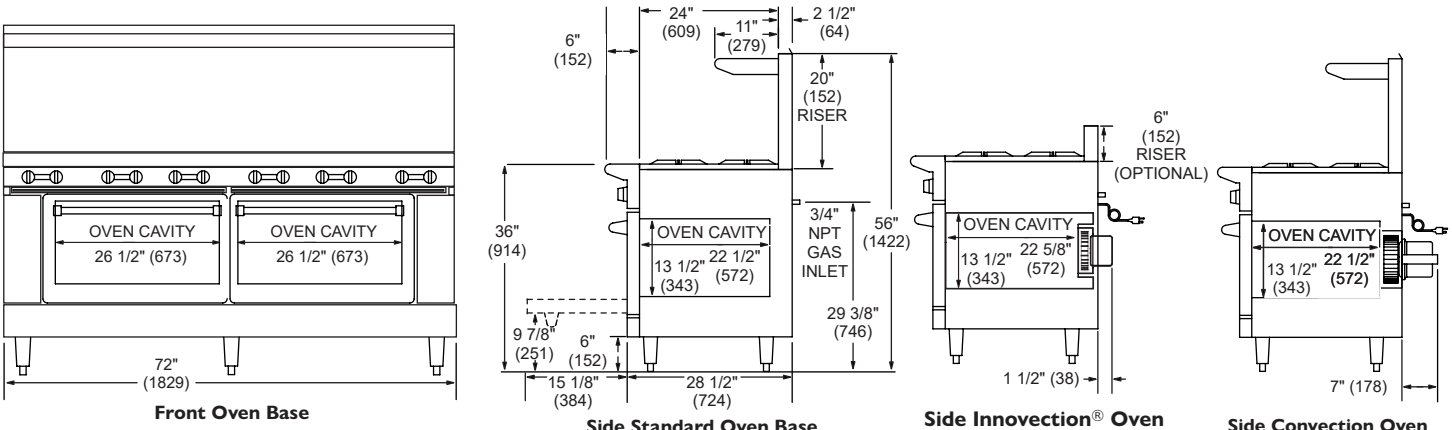

TOP	MODEL	BTU	(KW)	BURNERS	GRIDDLE SIZE	Shipping Weight*	
						LBS	(KG)
	AR-12	454,000	(133)	12	N/A	810	(367)
	AR-12-NN	444,000	(131)	12	N/A	890	(404)
	AR-12-CC	444,000	(131)	12	N/A	890	(404)
	AR-12-DSB	384,000	(113)	12	N/A	640	(290)
	AR-12G-10B	410,000	(121)	10	12" (305 MM)	720	(327)
	AR-12G-10B-NN	400,000	(118)	10	12" (305 MM)	800	(363)
	AR-12G-10B-CC	400,000	(118)	10	12" (305 MM)	800	(363)
	AR-12G-10B-DSB	340,000	(100)	10	12" (305 MM)	550	(249)
	AR-24G-8B	366,000	(108)	8	24" (610 MM)	840	(381)
	AR-24G-8B-NN	420,000	(124)	8	24" (610 MM)	920	(417)
	AR-24G-8B-CC	420,000	(124)	8	24" (610 MM)	920	(417)
	AR-24G-8B-DSB	296,000	(87)	8	24" (610 MM)	670	(304)
	AR-36G-6B	322,000	(95)	6	36" (914 MM)	855	(388)
	AR-36G-6B-NN	312,000	(92)	6	36" (914 MM)	935	(424)
	AR-36G-6B-CC	312,000	(92)	6	36" (914 MM)	935	(424)
	AR-36G-6B-DSB	252,000	(74)	6	36" (914 MM)	685	(311)
	AR-48G-4B	278,000	(82)	4	48" (1219 MM)	870	(395)
	AR-48G-4B-NN	268,000	(79)	4	48" (1219 MM)	950	(431)
	AR-48G-4B-CC	268,000	(79)	4	48" (1219 MM)	950	(431)
	AR-48G-4B-DSB	208,000	(61)	4	48" (1219 MM)	700	(317)
	AR-60G-2B	234,000	(69)	2	60" (1524 MM)	885	(401)
	AR-60G-2B-NN	224,000	(66)	2	60" (1524 MM)	965	(438)
	AR-60G-2B-CC	224,000	(66)	2	60" (1524 MM)	965	(438)
	AR-60G-2B-DSB	164,000	(48)	2	60" (1524 MM)	715	(324)
	AR-72G	190,000	(56)	N/A	72" (1524 MM)	900	(408)
	AR-72G-NN	180,000	(53)	N/A	72" (1524 MM)	980	(444)
	AR-72G-CC	180,000	(53)	N/A	72" (1524 MM)	980	(444)
	AR-72G-DSB	120,000	(35)	N/A	72" (1524 MM)	730	(331)

Specify type of gas and altitude if over 2000 feet.

Please specify gas type when ordering.

COMBUSTIBLE WALL CLEARANCES:

For use only on non-combustible floors. Legs or casters are required, or 2" (51) overhang is required when curb mounted. Clearance from non-combustible walls is 0". When unit is placed next to combustible walls, clearances must exceed 12" (305) from sides, and 4" (102) from rear.

Commercial cooking equipment requires an adequate ventilation system. For additional information, refer to the National Fire Protection Association's standard.

NFPA96 "Vapor Removal from Cooking Equipment." (NOTE: For North America only)

**"C" = Convection Oven, "NV" = Innovation Oven, "SB" = Storage Base, "G" = Manual Griddle Top. Griddle on the left, storage base on the right.**

**Combo base options available – choose standard, convection or innovation ovens or storage base, contact the factory.**

CONVECTION OVEN ELECTRICAL		
VOLTAGE	PHASE	AMPS
120	1	4

INNOVATION OVEN ELECTRICAL		
VOLTAGE	PHASE	AMPS
120	1	1

MANIFOLD PRESSURE		
NATURAL GAS	PROPANE GAS	MANIFOLD SIZE
5.0" W.C.	10.0" W.C.	3/4" (19MM)

NMFCODE: 25970-2 Class: 85

\*Shipping weight includes packaging and is approximate.

15 amps three prong cord provided



13592 Desmond St Pacoima CA 91331  
 T. 818.897.0808 F. 818.897.1670  
 Toll Free: 888.753.9898  
 www.AmericanRange.com